

Key Features

- Text Area: 11 rows x 28 columns.
- Text can be placed anywhere on the Screen.
- Text Inserted Cannot be Edited.
- Event Alert on Specific Text Input.
- 16 x 2 LCD display for Configuration.
- Keyboard Interface for Configuration
- Alarm Signal during input Video Failure.
- Non-Volatile Memory for Storage.
- Real Time Clock (RTC) facility.
- Bank/ Branch/Date/Time display on Video.
- RS 232 interface / RS 485 / Ethernet.
- Order of Customer Data displayed as per Specifications.
- Input Voltage: 12 volts (0.7 A).
- Operating Temperature: 5° C to 40° C.
- Variable Baud Rate: 1,200 to 38,400 bps.




Honey Teq Automations

97/18,10th Street, Chowdry Nagar, Valasaravakkam
Chennai, Tamil Nadu - 600 087 (India)

Phone : +(91)-(44)-24862497, Fax : +(91)-(44)-24860174

www.honeyteq.com. e-mail: murugan@honeyteq.com

DATA TEXT INSERTER

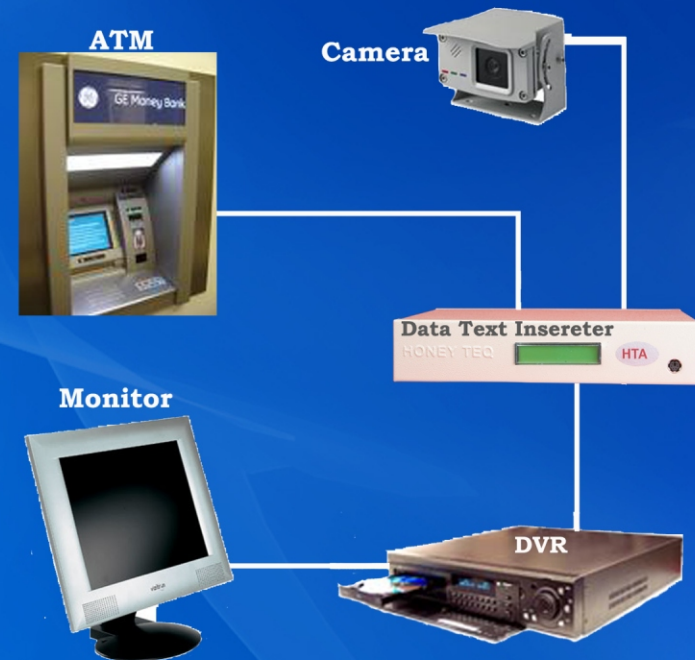

HONEY TEQ